


# Anytone AT-D890UV NXDN settings

Open CPS and go to NX Setting.

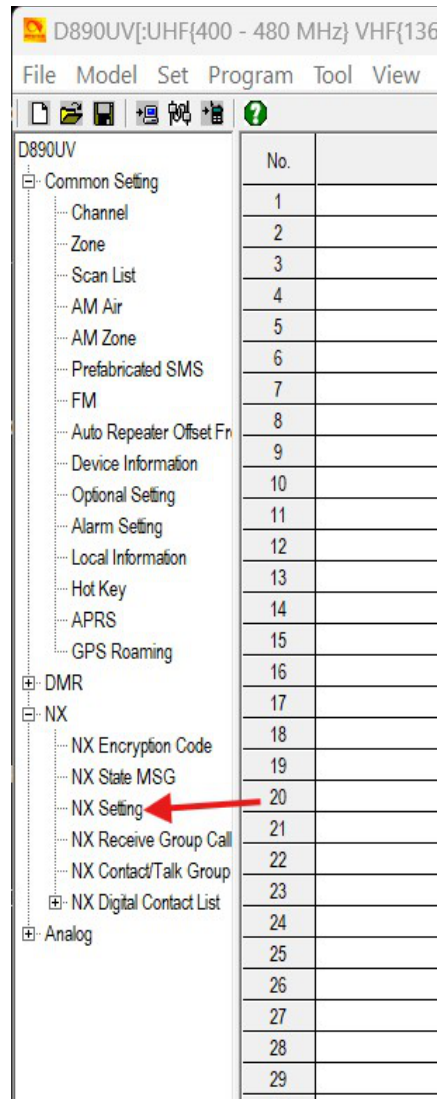


## Fill in each -


Unit ID (Own) = With your **Ham Radio NXDN ID** “ <https://radioid.net/> ”

Base ID = With your Ham Radio NXDN ID

Air Lias Name = Your Ham Radio Callsign

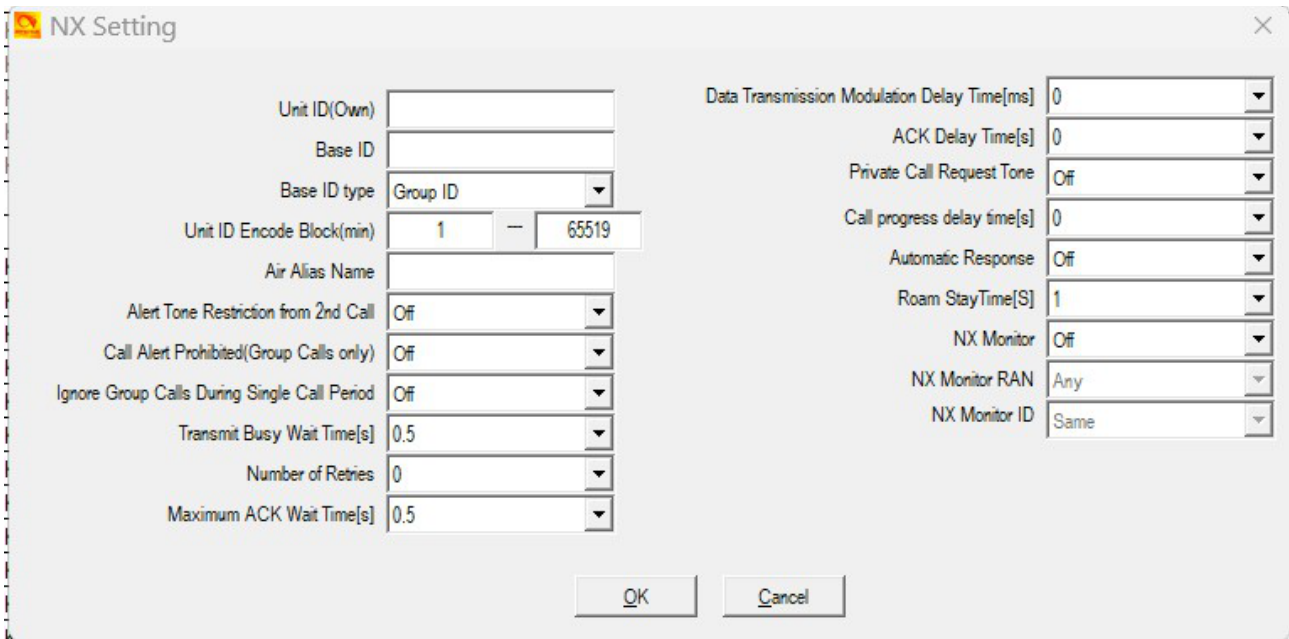

**Next go to NX Contact Talk Group**  
**Add what you need**

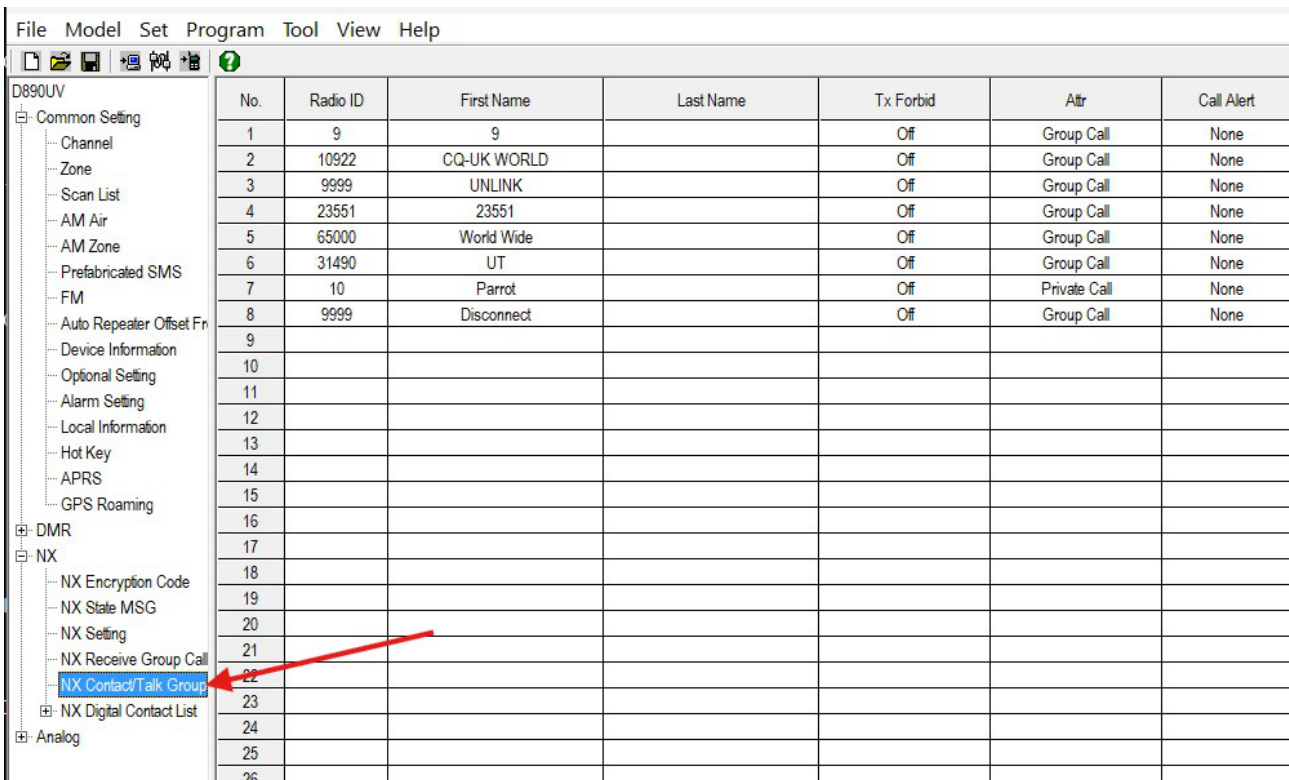

**Now go to Channels.**


Send Talker Alias DMR/NX = This can be ON or OFF. Up to you.

Contact/Talk Group = Set to what you want on that channel.

The next three set as shown.

PTT ID = On

RAN Encode / Decode = 1 to 63

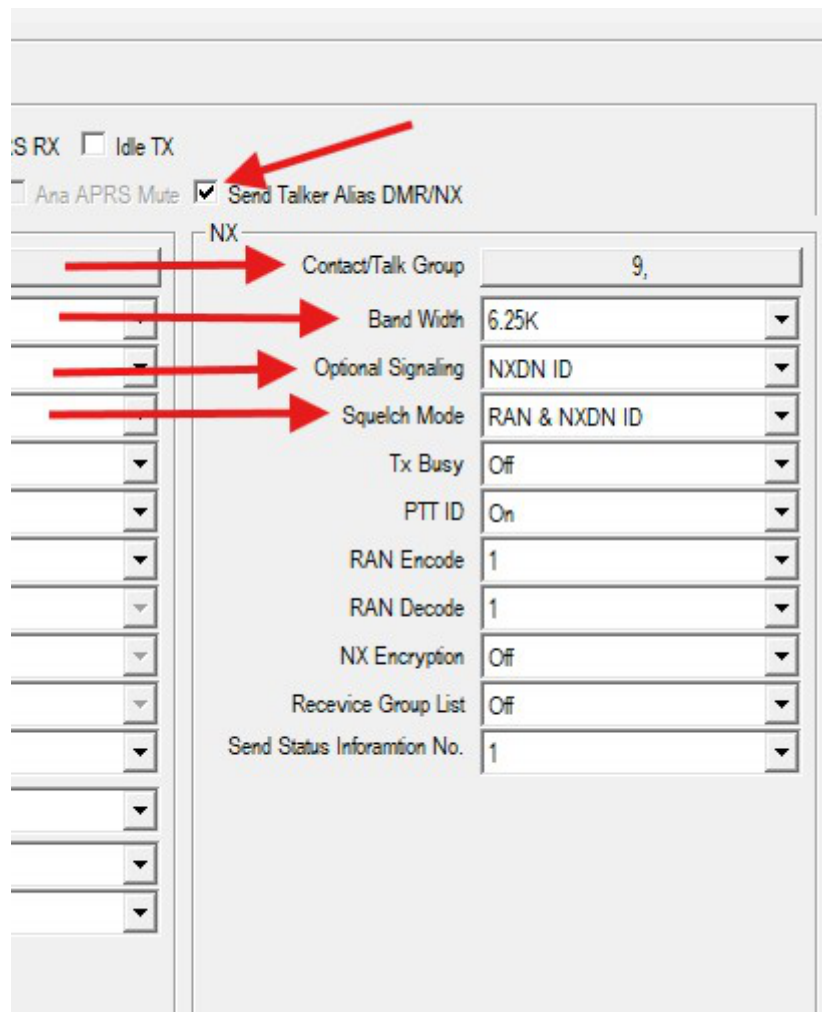

Save Channel  
Add to Zone

## Change radio from DMR to NXDN


### From Radio -

Menu – Settings – Radio Set – Other Func – Protocol – and NXDN

### From Function Key -

Set a key to – Digital Protocol

**Via CPS you can set to startup in DMR or NXDN**

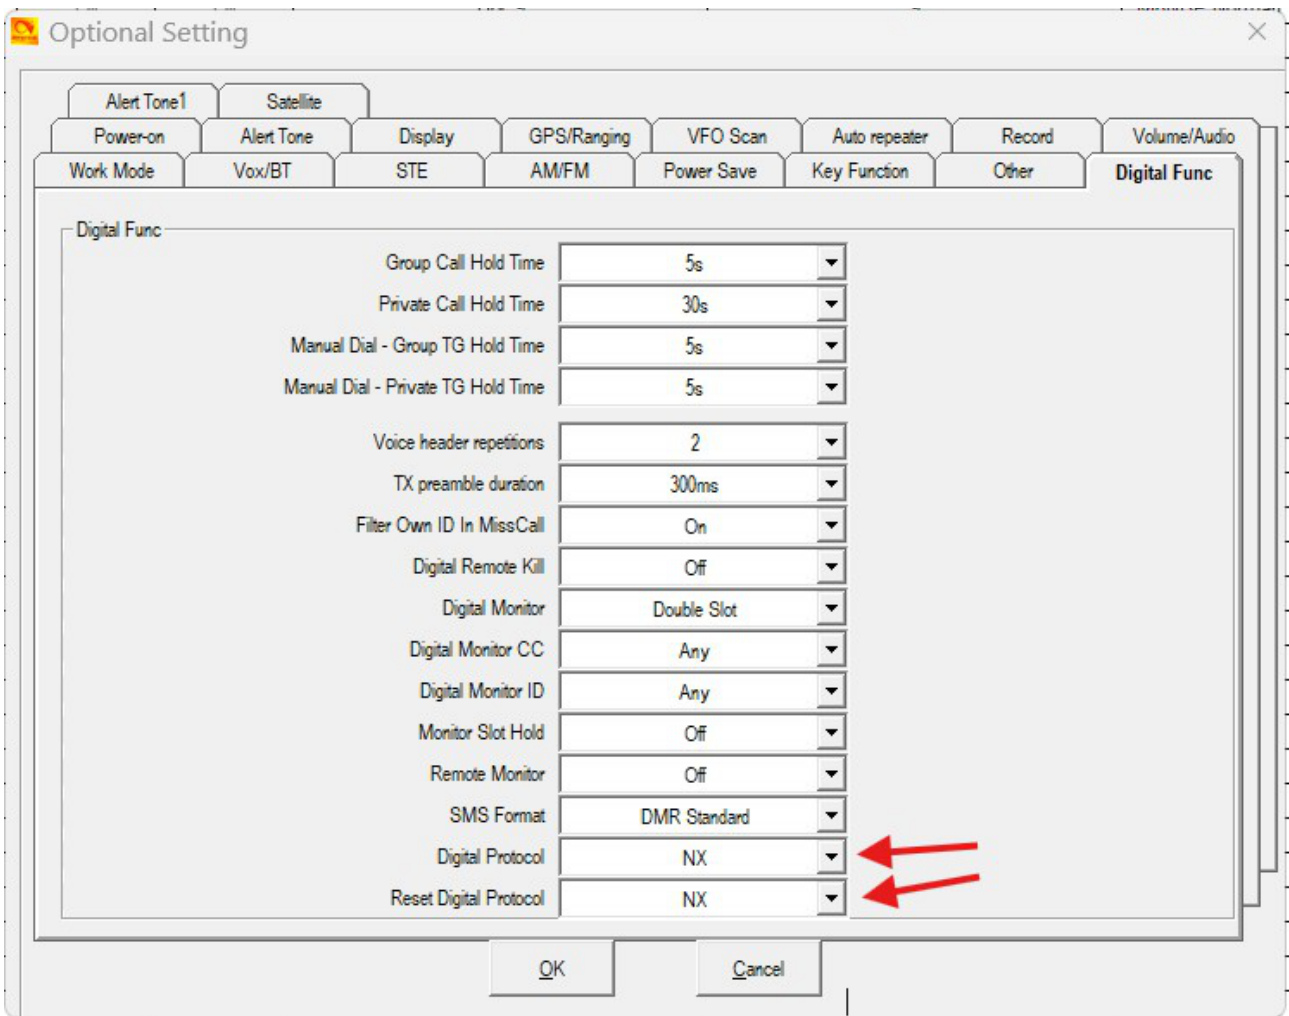

<http://tiny.cc/AnytoneDMR>