


# Add Talk Groups

**TOT (Radio Timeout Timer) Must be set to 180s**  
CPS – Optional Settings – Other




TOT 180s

**TX Permit = Same, Channel Free, Different Color Code - "Never set to Always"**

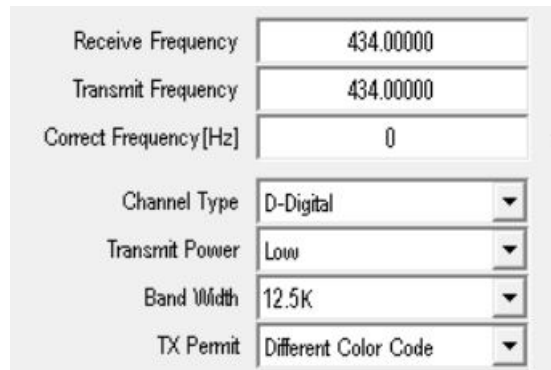

Receive Frequency 434.00000  
Transmit Frequency 434.00000  
Correct Frequency [Hz] 0  
Channel Type D-Digital  
Transmit Power Low  
Band Width 12.5K  
TX Permit Different Color Code


**1st you need to add the Talk Group to TALK GROUPS as a GROUP CALL**

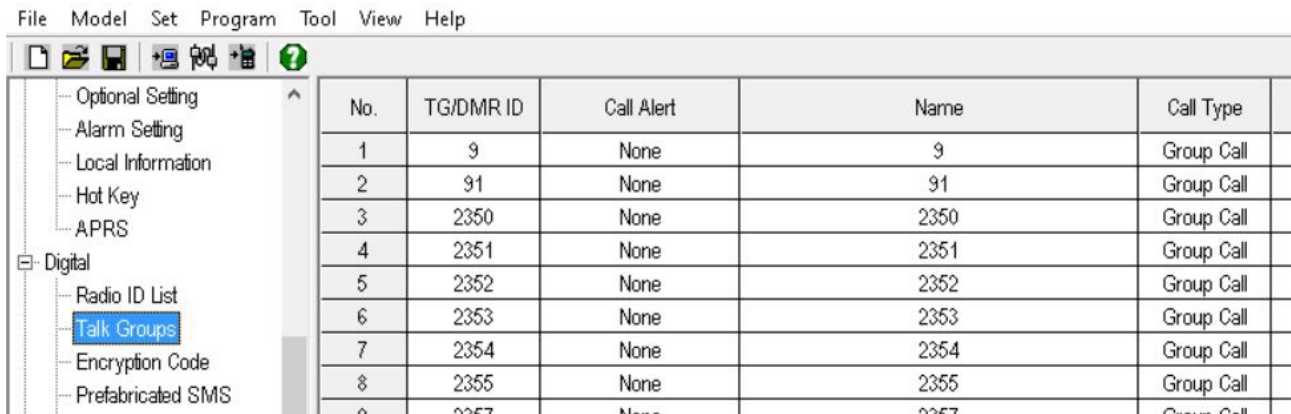

File Model Set Program Tool View Help

No.	TG/DMR ID	Call Alert	Name	Call Type
1	9	None	9	Group Call
2	91	None	91	Group Call
3	2350	None	2350	Group Call
4	2351	None	2351	Group Call
5	2352	None	2352	Group Call
6	2353	None	2353	Group Call
7	2354	None	2354	Group Call
8	2355	None	2355	Group Call
9	2357	None	2357	Group Call

**Double click the next empty line and fill in**

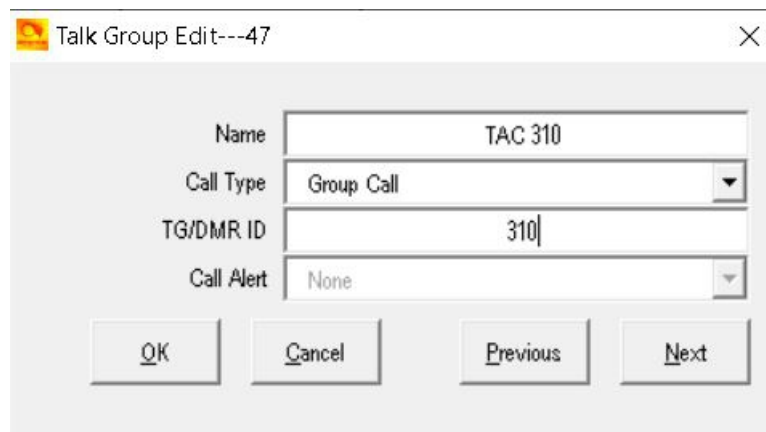

Talk Group Edit---47


Name TAC 310  
Call Type Group Call  
TG/DMR ID 310  
Call Alert None

OK Cancel Previous Next


(907 - Group Call)  
(91 - Group Call)  
(4000 - Group Call)

**Save by clicking OK**


**Make up a channel for each Talk Group you wish to use.**



**Add each channel to a Zone List.**

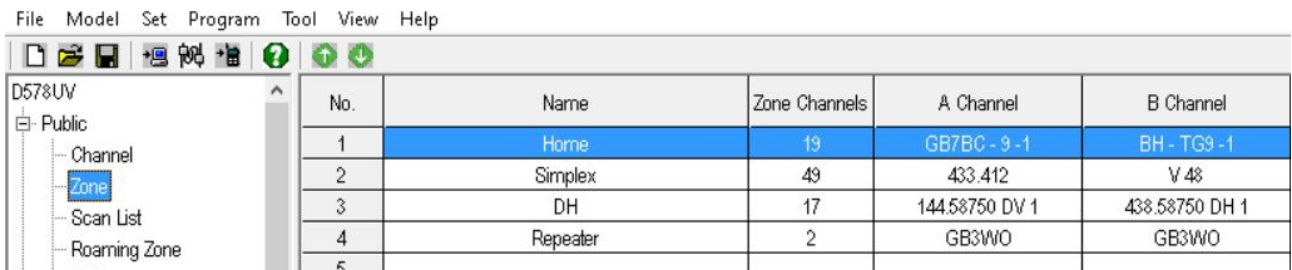

No.	Name	Zone Channels	A Channel	B Channel
1	Home	19	GB7BC - 9 - 1	BH - TG9 - 1
2	Simplex	49	433.412	V 48
3	DH	17	144.58750 DV 1	438.58750 DH 1
4	Repeater	2	GB3WO	GB3WO
5				

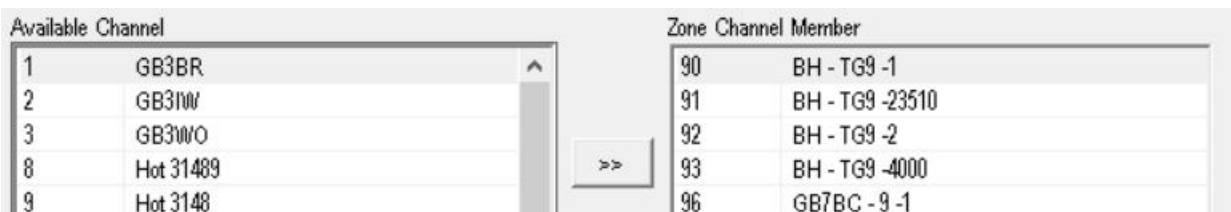

Available Channel		Zone Channel Member	
1	GB3BR	90	BH - TG9 - 1
2	GB3IW	91	BH - TG9 - 23510
3	GB3WO	92	BH - TG9 - 2
8	Hot 31489	93	BH - TG9 - 4000
9	Hot 3148	96	GB7BC - 9 - 1

**Save Codeplug  
Send Codeplug to radio**

Turn radio to required ZONE and channel.  
TX to open that Talk Group.  
Now you can TX and RX in that Talk Group.

4000 - "Group Call" Disconnect from TG

[Brandmeister World Wide Talk Groups](#)

[Add Talkgroup via Keypad](#)

<http://tiny.cc/AnytoneDMR>