

Change Mode 868–878–578–6X2 Not the D168

Doing this Mod Can/Will void your warranty.

Download this “AT Options version 8” [software](#) and un-Zip with ([7-Zip](#) – [Video 1](#) – [Video 2](#))

Software requires Windows 7 or higher

Anytone Options

Band Select
 Full Test Mode
 Chinese

Area Code

Manufacture Code

Radio Type

Band Setting Password

Frequency

Program Password

Serial Number

Production Date

Maintenance Date

Maintenance Description

Com Port

Read

Exit

Dealer Information

Dealer Code

Stock Date

Sell Date

Seller

Open the software by double clicking on the - AT_Options.exe -

Plug radio into Computer.
Set Com Port.

Then Click – **Read**.

The radio will send info and reboot.

The info for that radio is now in the software.

Go to Frequency and you will see what your radio default is.

UK we want to change to Band 0

Use the pull down to select the band you want.

Now **Write** back to radio.


The screenshot shows the 'Anyone Options' software window. It contains several configuration fields and buttons:

- Band Select
- Full Test Mode
- Chinese
- Area Code:
- Manufacture Code:
- Radio Type:
- Band Setting Password:
- Frequency: (dropdown menu)
- Program Password:
- Serial Number:
- Production Date:
- Maintenance Date:
- Maintenance Description:
- Com Port: (dropdown menu)
- Buttons: Read, Write, Exit
- Dealer Information section with fields for Dealer Code, Stock Date, Sell Date, and Seller.

Next

In the CPS – Model – Model Information

Make sure the Band displayed matches the same as you have now set the Radio to.

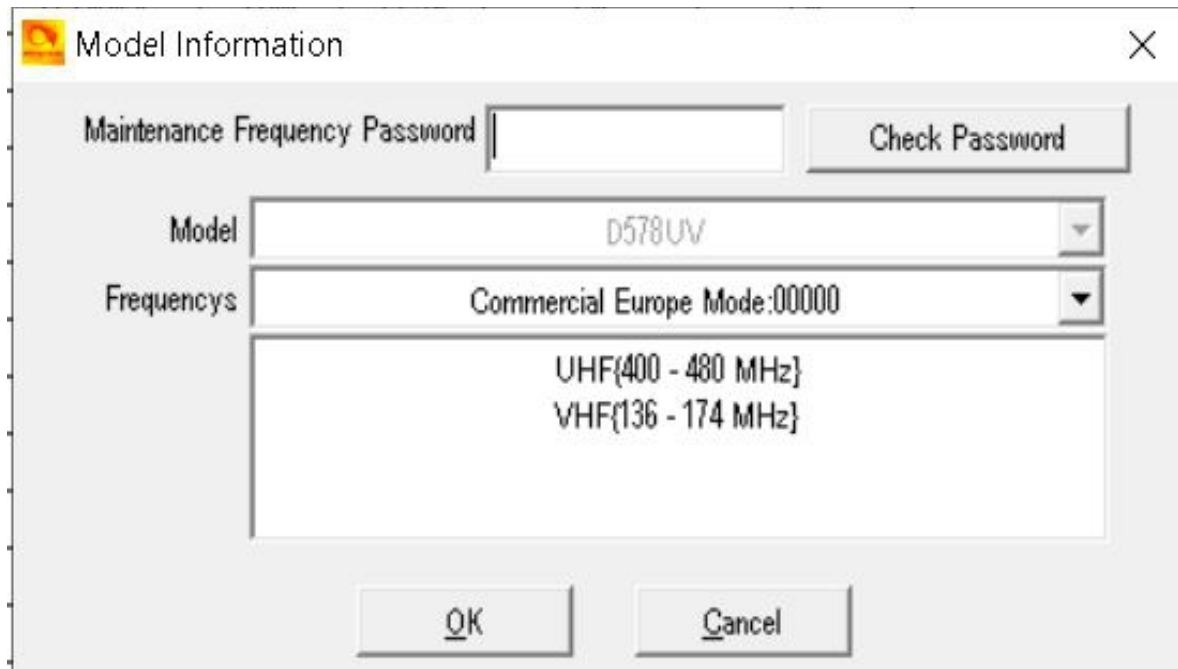

Options

1. Read the radio to the CPS and build your codeplug.
2. Via [Import CSV](#) rebuild your codeplug.

Remember to save this as your working Codeplug.

That is it.

<http://tiny.cc/AnytoneDMR>