


Anytone DMR Simplex UK v2

Anytone Radio settings for each channel

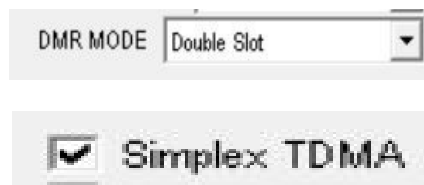

Time Slot 1

Color Code 1

Talk Group 9 (USA, Canada, EU etc use Talk Group 99)

UHF / VHF DV [SIMPLEX](#)

DMR Time Slot 1 , Colour Code 1 , Talk Group 9

The time slot, color code and talk group are based on what's in the majority of code plugs

UHF	VHF
DH1 438.5875 Sussex Simplex	DV1 144.5875 Sussex Simplex
DH2 438.6000	DV2 144.6000
DH3 438.6125 (DV calling channel)	DV3 144.6125 (DV calling channel)
DH4 438.6250	DV4 144.6250
DH5 438.6375	DV5 144.6375
DH6 438.6500	DV6 144.6500
DH7 438.6625	DV7 144.6625
DH8 438.6750	DV8 144.6750
	V16 to V19
U273 to U279	V21 to V39
U281 to U286	V41 to V47