
Anytone 878 Sending / Receive Talker Alias


Talker Alias Settings

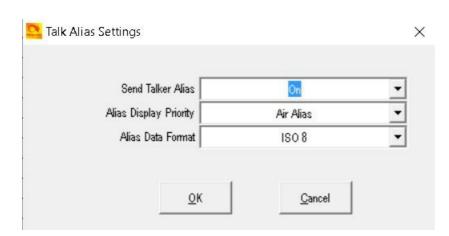

Alias Display Priority -

Air Alias - will show up on the radio as Digital Contact List 1st and then swap to TA display. **Contact Alias** - will show Digital Contact List.

Alias Data Format - ISO-8 should be used.

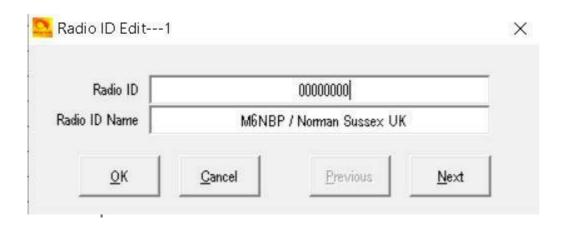

Radio ID List -

Radio ID - DMR ID Number

Radio ID Name -You can have up to 26 characters under ISO-8

The / is required under some country rules like the USA if you add extra text after your Callsign. I have not read up on the UK rules.

As I talk to the USA a lot I have added the / as I have more text after my Callsign.

NOTE -

Not all Networks and DMR Repeaters (Motorola) offer or handle Talk Alias.

Talker Alias does work on Brandmeister and Hotspots.